



MURAL FLATWORK IRONERS

WITH STATE -OF-THE-ART FEATURES

FEATURES

CM-2050-2650-3350

- Dries and irons in a single operation directly from a high speed spin washer extractor.
- Front feeding and return of the linen.
- Microprocessor with 7 preset speeds of ironing.
- Single roll \varnothing 500 mm in polished steel.
- Working width 2.000, 2.600 and 3.300 mm.
- Stainless steel panels.
- Motor with speed inverter.
- Built-in cool down system.
- Feeding and ironing by Nomex bands.
- Double emergency stops: hands safety bar and front emergency push-button.
- Heating protection by 2 thermostats.
- Electric, steam or gas heated.
- Two versions of gas heated models:
 - Gas model with atmospheric burner.
 - **NEW** gas model with **radiant burner. 25% gas consumption savings and 25% more production.**
- CE, ETL and gas certifications.




OPTIONS

- SMART SYSTEM (patented): automatic regulation of the ironing speed according to the residual moisture.
- Chrome plated roll.
- Reversing roll.
- Other voltages different to standard one.



TECHNICAL DATA	UNIT.	CM-2050	CM-2650	CM-3350			
GENERAL DETAILS							
Theoretical production 45% humidity	Kg/h	50-70	60-80	80-120			
Theoretical production 45% humidity, Radiant burner	Kg/h	62-87	75-100	100-150			
Ø Roll	mm	500	500	500			
Working width	mm	2.000	2.600	3.300			
Height floor-feeding belts	mm	1.030	1.030	1.030			
Working speed	mt/min	1,5-8	1,5-8	1,5-8			
POWER							
Heating power (electric model)	kW	31,5	40,5	54			
Total electric power (electric model)	kW	32,12	41,37	54,87			
Heating power (gas model)	kW	40	55	69			
Total electric power (gas model)	kW	0,87	0,87	0,87			
Heating power (steam model)	kW	50	64	81			
Total electric power (steam model)	kW	0,62	0,87	0,87			
Roll motor power	kW	0,37	0,37	0,37			
Fan motor power	kW	0,25 (gas x 2)	0,25 x 2	0,25 x 2			
CONNECTIONS							
Tension 230V - III + T	N° x mm2 / A	4 x 35 / 100A	4 x 2,5 / 2A	4 x 50 / 125A	4 x 2,5 / 2A	4 x 70 / 160A	4 x 2,5 / 2A
Tension 400V - III + N + T	N° x mm2 / A	5 x 10 / 50A	5 x 2,5 / 2A	5 x 16 / 63A	5 x 2,5 / 2A	5 x 25 / 100A	5 x 2,5 / 2A
Ø Gas inlet	BSP	1"	1"	1"	1"	1"	1"
Ø Steam inlet	BSP	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Ø Condensed (Steam models)	BSP	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
DIMENSIONS / PACKAGING DIMENSIONS							
Width / Width	mm	2.810/3.010	3.420/3.610	4.120/4.310			
Depth / Depth	mm	956 / 1.150	956 / 1.150	956 / 1.150			
Height / Height	mm	1.189/1.500	1.189/1.500	1.189/1.500			
Weight / Weight	Kg	925/974	1.200/1.270	1.436/1.475			
Volume	m3	3,25/5,19	3,96/6,23	4,77/7,43			
OTHERS							
No. Fume outlet	N°	1	2	2			
Ø Fume outlet	mm	153	153	153			
Air flow	m3/h	600	1.200	1.200			
Sound Level	dB	63	65	65			

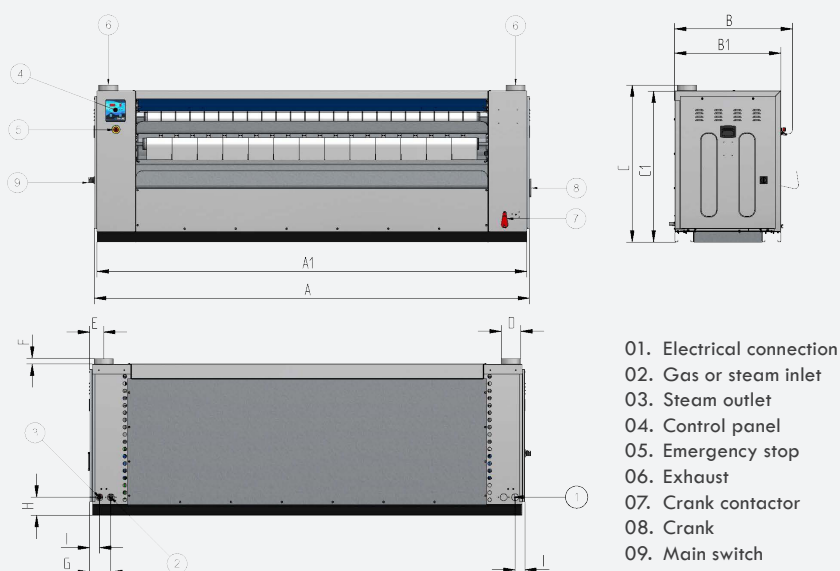

	A	B	C	A1	B1	C1	D	E	F	G	H	I
CM-2050	2.870	956	1.233	2.810	836	1.189	Ø 153	88	97	145	143	55
CM-2650	3.420	956	1.233	3.420	836	1.189	Ø 153	88	97	145	143	55
CM-3350	4.180	956	1.233	4.120	836	1.189	Ø 153	88	97	145	143	55