

DE - 28/36 EXCELLENCE TUMBLE DRYERS

T2 CONTROL

User friendly and totally programmable 7" T2 USB Connection. PC software free of charge for programming, traceability, data analysis... Videos on display (ads, instructions, etc.) 37 languages

OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard

EFFICIENCY

SMART DRY- Intelligent humidity control. With new drum inlet temperature control.
AIR RECOVERY SYSTEM- Efficient air recirculation system
INSULATED PANEL- Complete air-flow circuit
Double door glass
FULL FLOW- New 'optimized' system of mixed airflow.
Big fluff filter

CONNECTIVITY

Remote technical service
Management of laundries: OPL



VERSATILITY

Make to order- customisation
WET CLEANING



ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters
Opening sense of door adjustable on site



MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance



OTHERS

Grey skinplate outer casing, stainless steel look
Integrated Fire Extinguishing System
SOFT DRY- new drum with stamped holes
COOL DOWN- anti-wrinkle at the end of the cycle
Heating options: electric, gas and steam
CE approved




OPTIONS

New dosing/vaporizing system
Printer
Primerlink communication kit
Tropicalized model
Stainless steel AISI 304 outer casing
Stainless steel AISI 304 front panel
Stainless steel battery
Low pressure steam battery
Wooden packing
Reverse door opening
Exhaust silencer Ø200
Rear panel external air + filter
Ship voltage for electric models:
440V III 50/60 Hz No N



TECHNICAL DATA	UNIT.	DE-28	DE-36		
CAPACITY					
Capacity 1/18	Kg	31	37		
Capacity 1/20	Kg	27	33		
Hourly Output EXCELLENCE*	Kg/h	61,1	73,3		
Evaporation capacity EXCELLENCE*	l/h	31,8	34,7		
DRUM					
Ø Drum	mm	947	947		
Ø Door	mm	802	802		
Door center height	mm	1.040	1.040		
Load hole bottom height	mm	640	640		
Drum length	mm	780	936		
Drum volume	l	550	660		
POWER					
Drum motor power	Kw	0,55	0,55		
Fan motor power EXCELLENCE	Kw	0,75	0,75		
Electric heating power ALL RANGES	Kw	30	36		
Total electric power (elec.model) EXCELLENCE	Kw	31,35	37,35		
Gas heating power ALL RANGES	Kw	41	41		
Total electric power (gas model) EXCELLENCE	Kw	1,35	1,35		
Steam heating power ALL RANGES	Kw	50,1	50,1		
Steam heating power (gas model) EXCELLENCE	Kw	1,35	1,35		
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 35 / 100A	4 x 1,5 / 20A	4 x 50 / 125A	4 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 16 / 63A	5 x 1,5 / 20A	5 x 16 / 63A	5 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	1"		1"	
Ø Condensed (Steam models)	BSP	1"		1"	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	985/1.065		985/1.065	
Net Depth / Gross Depth	mm	1.054/1.154		1.210/1.310	
Net Height / Gross Height	mm	1.946/2.080		1.946/2.080	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	230/260		260/285	
OTHERS					
Max airflow EXCELLENCE	m3/h	1.500		1.500	
Ø Fume exhaust	mm	200		200	
Sound level EXCELLENCE	dB	65		65	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

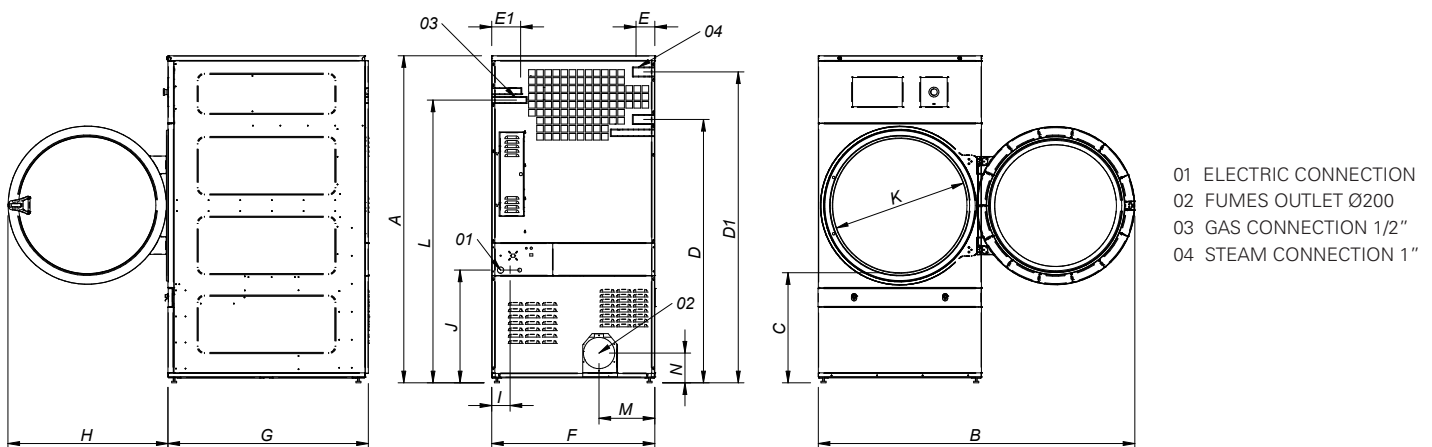

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N
DE-28	1946	1910	640	1590	1875	113	174	985	1054	957	110	680	802	1707	337	178
DE-35	1946	1910	640	1590	1875	113	174	985	1210	957	110	680	802	1707	337	178

