

DTT-28/36 ECO-ENERGY TUMBLE DRYERS



TOUCH II

User friendly and totally programmable 7" Touch II USB Connection. PC software free of charge for programming, traceability, data analysis... Videos on display (ads, instructions, etc.) 37 languages



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

EFFICIENT DRY - Intelligent humidity control. With new drum inlet temperature control
AIR RE-CYCLE - Efficient air recirculation system
THERMAL INSULATION
Double door glass
FULL FLOW - New 'optimized' system of mixed airflow
Big fluff filter



VERSATILITY

Make to order - customisation
WET CLEANING



CONNECTIVITY

Remote technical service
Management of laundries



ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters
Opening sense of door adjustable on site



MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance



OTHERS

Grey skinplate outer casing, stainless steel look
SFEX - Integrated Fire Extinguishing System
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Heating options: electric, gas and steam
CE approved




OPTIONS

- New dosing/vaporizing system
- Printer
- DomusConnect communication kit
- Tropicalized model
- Rear panel external air + filter
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Stainless steel battery
- Low pressure steam battery
- Wooden packing
- Reverse door opening
- Exhaust silencer Ø200
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA	UNIT.	DTT-28 ECO-ENERGY		DTT-36 ECO-ENERGY	
CAPACITY					
Capacity 1/18	Kg	31		37	
Capacity 1/20	Kg	27		33	
Hourly Output ECO-ENERGY*	Kg/h	61,1		73,3	
Evaporation capacity ECO-ENERGY*	l/h	31,8		34,7	
DRUM					
Ø Drum	mm	947		947	
Ø Door	mm	802		802	
Door center height	mm	1.040		1.040	
Load hole bottom height	mm	640		640	
Drum length	mm	780		936	
Drum volume	l	550		660	
POWER					
Drum motor power	Kw	0,55		0,55	
Fan motor power ECO-ENERGY	Kw	0,75		0,75	
Electric heating power ALL RANGES	Kw	30		36	
Total electric power (elec.model) ECO-ENERGY	Kw	31,35		37,35	
Gas heating power ALL RANGES	Kw	41		41	
Total electric power (gas model) ECO-ENERGY	Kw	1,35		1,35	
Steam heating power ALL RANGES	Kw	50,1		50,1	
Steam heating power (gas model) ECO-ENERGY	Kw	1,35		1,35	
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 35 / 100A	4 x 1,5 / 20A	4 x 50 / 125A	4 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 16 / 63A	5 x 1,5 / 20A	5 x 16 / 63A	5 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	1"		1"	
Ø Condensed (Steam models)	BSP	1"		1"	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	985/1.065		985/1.065	
Net Depth / Gross Depth	mm	1.054/1.154		1.210/1.310	
Net Height / Gross Height	mm	1.946/2.080		1.946/2.080	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	230/260		260/285	
OTHERS					
Max airflow ECO-ENERGY	m3/h	1.500		1.500	
Ø Fume exhaust	mm	200		200	
Sound level ECO-ENERGY	dB	65		65	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

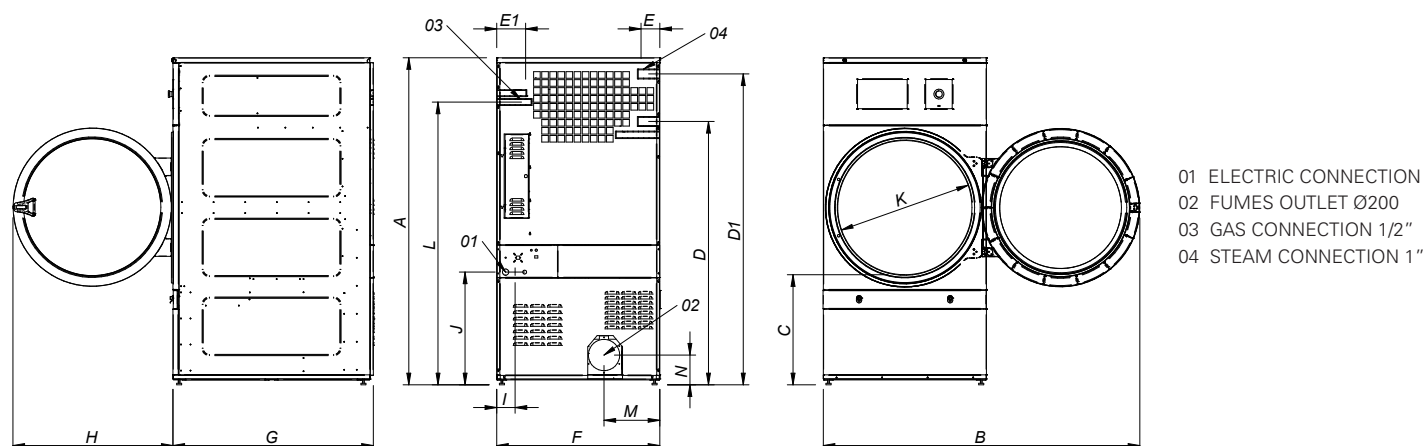

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N
DTT-28	1946	1910	640	1590	1875	113	174	985	1054	957	110	680	802	1707	337	178
DTT-36	1946	1910	640	1590	1875	113	174	985	1210	957	110	680	802	1707	337	178