



TUMBLE DRYERS

SOMETIMES LESS CAN BE MORE

FEATURES

- Tumble dryer in galvanised steel.
- Big loading door (opening of 180°).
- Transmission is by means of a pulley and Poly-V belt, as well as supporting wheels in the front.
- Time and temperature selection. (These models do not allow the moisture control option).
- REVERSE ACTION: All models offer the reverse turning of the drum.
- Drum in galvanised steel.
- Radial airflow circuit.
- FULL SCREEN FILTER: New filter drawer with wide surface and improved airflow.
- COOL DOWN: Anti-wrinkle at the end of cycle.
- Models available in electric or gas heating.

DLC-28-36 LOW COST




OPTIONS

- Version in 60 Hz.
- Marine versions 440V III 60 Hz No neutral or 480V III 60 Hz No neutral.



TECHNICAL DATA	UNIT.	DTA/DTP-28 LOW COST	DTA/DTP-36 LOW COST		
CAPACITY					
Capacity 1/18	Kg	31	37		
Capacity 1/20	Kg	27	33		
Hourly Output LOW COST	Kg/h	55	66		
Evaporation capacity LOW COST	l/h	28,6	34,3		
DRUM					
Ø Drum	mm	947	947		
Ø Door	mm	802	802		
Door center height	mm	1040	1040		
Load hole bottom height	mm	640	640		
Drum length	mm	780	936		
Drum volume	l	550	660		
POWER					
Drum motor power	Kw	0,55	0,55		
Fan Motor Power LOW COST	Kw	0,55	0,55		
Total Installed power LOW COST	Kw	31,15	37,15		
Electric Heating (Installed power)	Kw	30	36		
Gas heating (installed Power) in KW	Kw	41	41		
Gas heating (installed el. power) LOW COST	Kw	1,15	1,15		
Steam heating (Steam Power KW)	Kw	50,1	50,1		
Steam heating (installed el. power) LOW COST	Kw	1,15	1,15		
CONNECTIONS		ELECTRICAL	GAS	ELECTRICAL	GAS
Tension 230V - I + N + T	Nº x mm2 / A	-	2 x 1,5 / 20A	-	2 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	3 x 35 / 100A	3 x 1,5 / 20A	3 x 50 / 125A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	4 x 16 / 63A	4 x 1,5 / 20A	4 x 16 / 63A	4 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
DIMENSIONS / PACKING DIMENSIONS					
Width / Width	mm	985/1065		985/1065	
Depth / Depth	mm	1054/1154		1210/1310	
Height / Height	mm	1946/2080		1946/2080	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	230/260		260/285	
OTHERS					
Max airflow LOW COST	m3/h	1200		1200	
Ø Fume exhaust	mm	200		200	
Sound level LOW COST	dB	65		65	

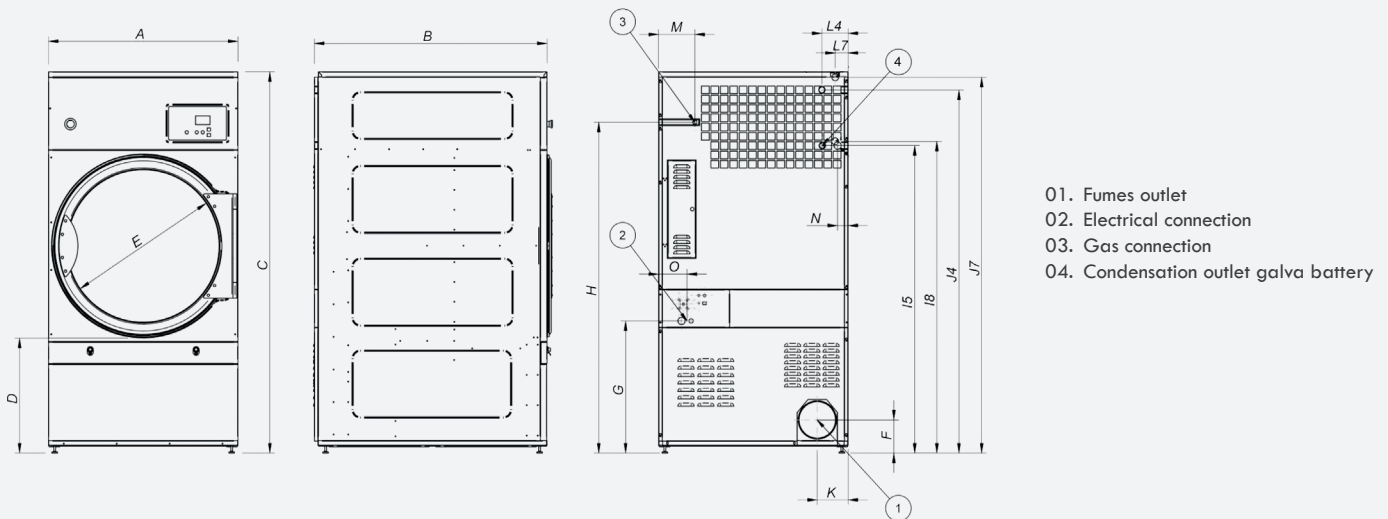

	A	B	C	D	E	F	G	H	I5	I8	J4	J7	K	L4	L7	M	N	O
DLC-28	985	1054	1946	577	802	172	685	1715	1594	-	1883	-	160	134	-	188	55	148
DLC-36	985	1210	1946	577	802	172	685	1715	1594	1616	1883	1948	160	134	67	188	55	690