



TUMBLE DRYERS

TWO IN ONE

FEATURES

- Construction in grey skinplate, stainless steel look.
- Big loading door (opening of 180°).
- Direct drive through a gearbox, no pulley.
- ELECTRONIC CONTROL: Easy and intuitive to use, the electronic control offers a complete control of the process.
- REVERSE ACTION: All models offer the reverse turning of the drum.
- STAINLESS STEEL DRUM standard.
- DOUBLE FLOW: Mixed axial-radial airflow to optimise and maximise the airflow circuit in the drum.
- SOFT DRY: The new drum with stamped holes makes sure the linen is gently handled.
- FULL SCREEN FILTER: New filter drawer with wide surface and improved airflow. Filter grid is standard 0,6mm in stack dryers.
- COOL DOWN: Anti-wrinkle at the end of cycle.
- Models available in electric or gas.
- **Self-service** there are two versions:
 - **DTP2 CP/2COIN** - to connect to a central pay or with 2 coiners as it can be ordered with 2 coin kits + boxes, and
 - **DTP2 1COIN** - to work with 1 coin.
- There is also a new token kit to be ordered with the token box.

DTP2-11-18 STACK



DTP2-11-18 STACK 2 COIN


DTP2-11-18 STACK 1 COIN

OPTIONS

- EFFICIENT DRY: Intelligent Moisture Control.
- SFEX: Integrated Fire Extinguishing System.
- Back panel with air filter.
- Double doorglass.
- Stainless steel body.
- Stainless steel front panel.
- Model versions in 60 Hz.
- Marine versions 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



TECHNICAL DATA	UNIT.	DTP2-11 STACK	DTP2-18 STACK		
CAPACITY					
Capacity 1/18	Kg	23	37		
Capacity 1/20	Kg	22	34		
Hourly Output	Kg/h	34	53		
Evaporation capacity	l/h	17,5	27,4		
DRUM					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	547/1.522	547/1.522		
Load hole bottom height	mm	260/1.235	260/1.235		
Drum length	mm	475	746		
Drum volume	l	210	330		
POWER					
Drum motor power	Kw	0,25*2	0,25*2		
Fan Motor Power	Kw	0,25*2	0,25*2		
Total Installed power	Kw	25,1	25,1		
Electric Heating (Installed power)	Kw	12x2	12x2		
Gas heating (installed Power) in KW	Kw	12x2	12x2		
Gas heating (installed el. power)	Kw	1,1	1,1		
CONNECTIONS		ELECTRICAL	GAS	ELECTRICAL	GAS
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 25 / 80A	4 x 1,5 / 20A	4 x 25 / 80A	4 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 40A	5 x 1,5 / 20A	5 x 10 / 40A	5 x 1,5 / 20A
DIMENSIONS / PACKING DIMENSIONS					
Width / Width	mm	785/865		785/865	
Depth / Depth	mm	955/1.055		1.225/1.325	
Height / Height	mm	1.980/2.126		1.980/2.126	
Net weight / Gross weight	Kg	260/268		290/303	
OTHERS					
Max airflow	m3/h	500*2		500*2	
Ø Fume exhaust	mm	200		200	
Sound level	dB	64		64	

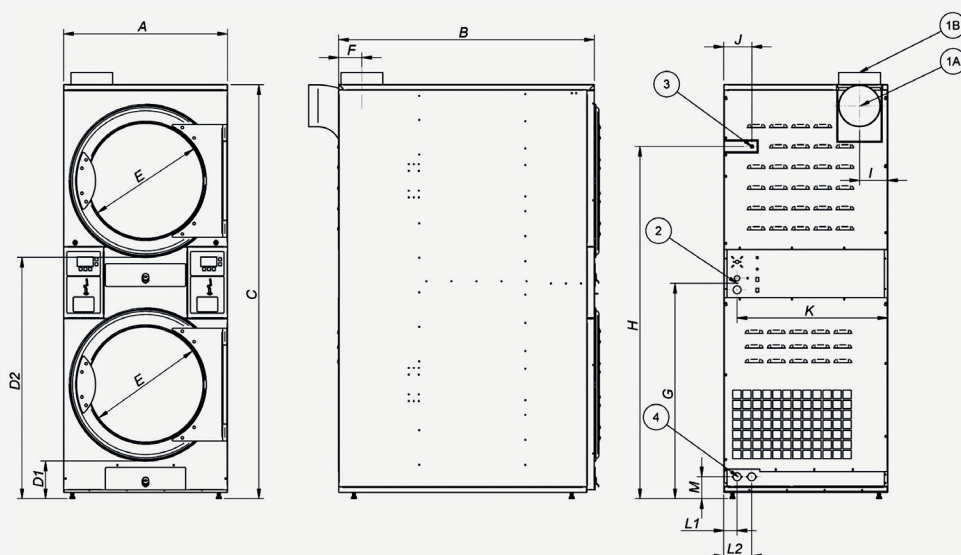

- 1A. Fumes outlet (rear option)
- 1B. Fumes outlet (upper option)
- 02. Electrical connection
- 03. Gas connection
- 04. Anti fire water valves

	A	B	C	D1	D2	E	F	G	H	I	J	K	L1	L2	M
DTP2-11	785	955	1.980	189	1.164	574	111	1.031	1.686	135	135	721	63	133	105
DTP2-18	785	1.225	1.980	189	1.164	574	111	1.031	1.686	135	135	721	63	133	105