



MURAL FLATWORK IRONERS WITH STATE -OF-THE-ART FEATURES


FEATURES

CM-1420

- Dries and irons in a single operation directly from a high speed spin washer extractor.
- Front feeding and return of the linen.
- Electric heated.
- Microprocessor 7 preset speeds of ironing.
- Single roll \varnothing 200 mm in polished steel.
- Available working width 1.400 mm.
- Motor with speed inverter.
- Built-in cool down system.
- Painted steel panels.
- Feeding and ironing by Nomex bands.
- Double emergency stops: hands safety bar and front emergency push-button.
- Heating protection by 2 thermostats.



TECHNICAL DATA	UNIT.	CM-1420
GENERAL DETAILS		
Theoretical production 45% humidity	Kg/h	12-14
Ø Roll	mm	200
Working width	mm	1.400
Height floor-feeding belts	mm	990
Working speed	mt/min	1-5
Electronic control	-	Yes
No. Programs	Nº	7
Length folder	Nº	No
POWER		
Heating power (electric model)	kW	10.5
Total electric power (electric model)	kW	10.84
Roll motor power	kW	0,25
Fan motor power	kW	0,09
DIMENSIONS / PACKAGING DIMENSIONS		
Width / Width	mm	1.878/2.100
Depth / Depth	mm	444/700
Height / Height	mm	1.335/1.570
Weight / Weight	Kg	180/220
Volume	m3	1.11/2.54
OTHERS		
No. Fume outlet	Nº	1
Ø Fume outlet	mm	56
Air flow	m3/h	300
Sound Level	dB	55

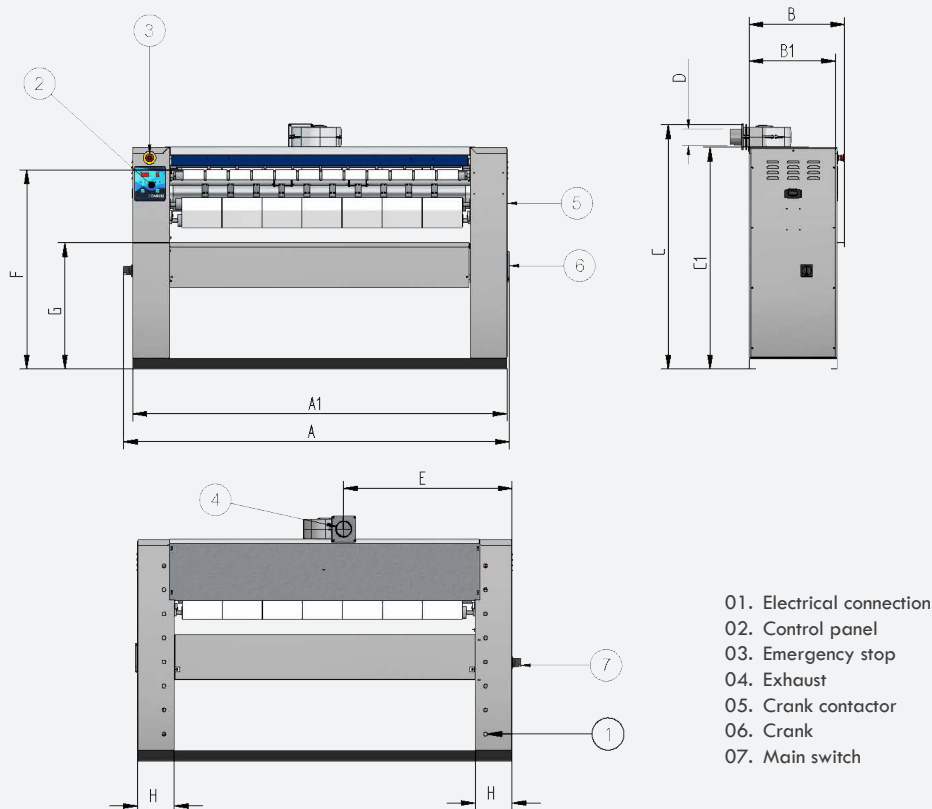

	A	B	C	A1	B1	C1	D	E	F	G	H	I
CM-1420	1.885	448	1.335	1.878	444	1.110	Ø 83	1.020	1.000	635	-	-