



COMPACT FLATWORK IRONERS

SHEER PRODUCTION VOLUME IN REALLY REDUCED SPACES

FEATURES

- Flatwork ironers with roll sizes: 2.600 and 3.300 mm long and diameter 1.000 mm.
- Panels in painted steel.
- One or two working lanes: one lane for bedsheets and two lanes for tablecloth and smaller pieces.
- Length fold (1 or 2 folds) and crossfold (up to 3 folds).
- Folding system by photocells and compressed air.
- Two types of linen stacker, with possibility to program the number of items stacked. The stacker can be positioned on either side of the machine.
- Polished steel roll, with finger guard.

SEXTANS SE26100-33100

- CE certificate and gas certifications.
- Frequency control.
- Feeding and ironing belts are Nomex.
- Touch-screen control: programs can be created with speed control (between 3 and 18 mts/min), temperature and folding parameters.
- Big output capacity, depending on the residual moisture of the linen, up to 290 kg/hour directly from the high spin washer extractor.
- Powerful exhaust system.
- Electric, gas or steam heating.
 - **NEW** gas model with **standard radiant burner.**
25% gas consumption savings and 25% more production.






OPTIONS

- Automatic 1 lane clamp feeder with vacuum feeding belts.
- Small pieces back collector: 2 or 4 lanes + By-Pass.
- Vacuum feeding belts.
- Partial by pass, so different programs can be used in each of the 2 working lanes.
- Linen reject system.
- Double air pressure in length folds for thicker linen.
- Stacker - 1 or 2 lanes.
- Compact (roll-off) stacker - only in 1 lane models.
- Special voltage.



TECHNICAL DATA	UNIT.	SE26100	SE33100
GENERAL DETAILS			
Theoretical production (45%) humidity	Kg/h	190-230	250-290
Ø Roll	mm	1.000	1.000
Working width	mm	2.600	3.300
Height floor-feeding	mm	1.110	1.110
Working speed	mt/min	4-18	4-18
Control type	-	Touch	Touch
Programmes	Nº	20	20
Side stacker	Nº	Yes	Yes
FOLDING			
1 lane - Primary fold	Nº	1-2	1-2
1 lane - Cross fold	Nº	1-2-3	1-2-3
2 lanes - Primary fold	Nº	1-2	1-2
2 lanes - Cross fold	Nº	1-2	1-2
POWER			
Heating power (electric model)	kW	90	90
Total electric power (electric model)	kW	94	94
Heating power (gas model)	kW	120	156
Total electric power (gas model)	kW	4	4
Heating power (steam model)	kW	120	150
Total electric power (steam model)	kW	4	4
CONNECTIONS			
Ø Gas inlet	BSP	1"	1"
Ø Steam inlet	BSP	1-1/4"	1-1/4"
Ø Condensed (Steam model)	BSP	1"	1"
Ø Air inlet	mm	12	12
DIMENSIONS / PACKAGING DIMENSIONS			
Width / Width	mm	3.718 / 3.800	4.418 / 4.500
Depth / Depth	mm	2.289 / 2.380	2.289 / 2.380
Height / Height	mm	2.279 / 2.529	2.279 / 2.529
Weight / Weight	Kg	3.960 / 4.410	4.460 / 5.110
Volume	m3	19,40 / 22,87	23,05 / 27,09
OTHERS			
No. Fume outlet	Nº	2	2
Ø Fume outlet	mm	120	120
Air flow	m3/h	2 x 1.000	2 x 1.000
Air Consumption (6,5 Bar)	Nl/h	21.000	21.000
Sound Level	dB	70	70

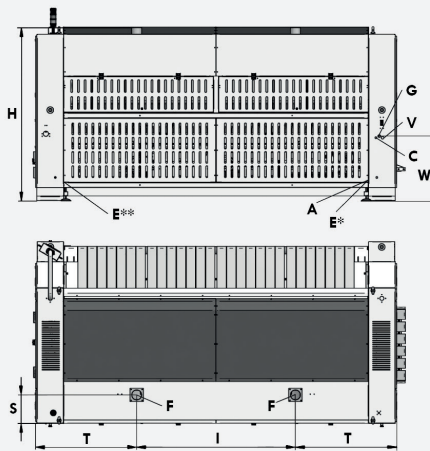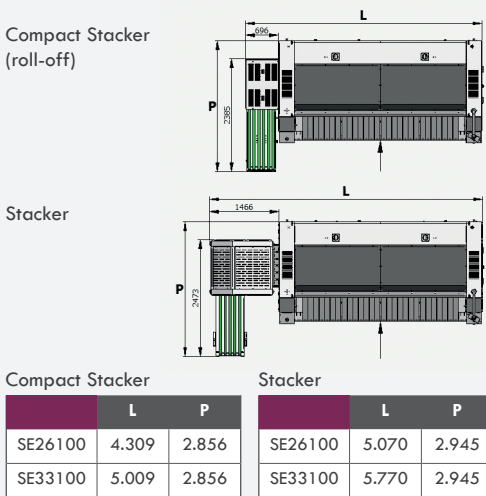

- A. Compressed air inlet
 - C. Condensation discharge (steam heating)
 - E. Electrical connection
 - F. Fumes discharge connection
 - G. Gas inlet (gas heating)
 - V. Steam inlet (steam heating)
- * Linen right exit
** Linen left exit

	H	I	T	S	A	C	E	F	G	V	W
SE26100 (mm)	2.247	1.196	1.208	345	Ø 12	1"	5G4	Ø 120	1"	1-1/4"	800
SE33100 (mm)	2.247	1.896	1.208	345	Ø 12	1"	5G4	Ø 120	1"	1-1/4"	800