



## COMPACT FLATWORK IRONERS

SHEER PRODUCTION VOLUME IN REALLY REDUCED SPACES

### FEATURES

### SEXTANS SE2660-3360

- Flatwork ironers with roll sizes: 2.600 and 3.300 mm long and diameter 600 mm.
- Panels in painted steel.
- One or two working lanes: one lane for bedsheets and two lanes for tablecloth and smaller pieces.
- Length fold (1 or 2 folds) and crossfold (up to 3 folds).
- Folding system by photocells and compressed air.
- Two types of linen stacker, with possibility to program the number of items stacked. The stacker can be positioned on either side of the machine.
- Polished steel roll, with finger guard.
- CE certificate and gas certifications.
- Frequency control.
- Feeding and ironing belts are Nomex.
- Touch-screen control: programs can be created with speed control (between 3 and 18 mts/min), temperature and folding parameters.
- Big output capacity, depending on the residual moisture of the linen, up to 140 kg/hour directly from the high spin washer extractor.
- Powerful exhaust system.
- Electric, gas or steam heating.



### OPTIONS

- Automatic 1 lane clamp feeder with vacuum feeding belts.
- Small pieces back collector: 2 or 4 lanes + By-Pass.
- Vacuum feeding belts.
- Partial by pass, so different programs can be used in each of the 2 working lanes.
- Linen reject system.
- Double air pressure in length folds for thicker linen.
- Stacker - 1 or 2 lanes.
- Compact (roll-off) stacker - only in 1 lane models.
- Special voltage.



SECADO DRYING



PLANCHADO IRONING



PLIEGUE LONGITUDINAL LENGTH FOLD




PLIEGUE TRANSVERSAL CROSSFOLD




APILADO STACKER

TECHNICAL DATA	UNIT.	SE2660	SE3360
<b>GENERAL DETAILS</b>			
Theoretical production (45%) humidity	Kg/h	75-105	110-140
Ø Roll	mm	600	600
Working width	mm	2.600	3.300
Height floor-feeding	mm	1.100	1.100
Working speed	mt/min	3-10	3-10
Control type	-	Touch	Touch
Programmes	N°	20	20
Side stacker	N°	Yes	Yes
<b>FOLDING</b>			
1 lane - Primary fold	N°	1-2	1-2
1 lane - Cross fold	N°	1-2-3	1-2-3
2 lanes - Primary fold	N°	1-2	1-2
2 lanes - Cross fold	N°	1-2	1-2
<b>POWER</b>			
Heating power (electric model)	kW	60	60
Total electric power (electric model)	kW	63,1	63,1
Heating power (gas model)	kW	65	82
Total electric power (gas model)	kW	3,1	3,1
Heating power (steam model)	kW	55	75
Total electric power (steam model)	kW	3,1	3,1
<b>CONNECTIONS</b>			
Ø Gas inlet	BSP	1"	1"
Ø Steam inlet	BSP	1"	1"
Ø Condensed (Steam model)	BSP	1/2"	1/2"
Ø Air inlet	mm	12	12
<b>DIMENSIONS / PACKAGING DIMENSIONS</b>			
Width / Width	mm	3.718 / 3.800	4.418 / 4.500
Depth / Depth	mm	2.209 / 2.300	2.209 / 2.300
Height / Height	mm	1.810 / 2.060	1.810 / 2.060
Weight / Weight	Kg	2.686 / 3.050	3.080 / 3.680
Volume	m3	14,87 / 18,00	17,66 / 21,32
<b>OTHERS</b>			
No. Fume outlet	N°	2	2
Ø Fume outlet	mm	120	120
Air flow	m3/h	2 x 1.000	2 x 1.000
Air Consumption (6,5 Bar)	NI/h	15.000	15.000
Sound Level	dB	70	70

Compact Stacker  
(roll-off)



Stacker





Compact Stacker

	L	P
SE2660	4.309	2.774
SE3360	5.009	2.774

Stacker

	L	P
SE2660	5.070	2.863
SE3360	5.770	2.863

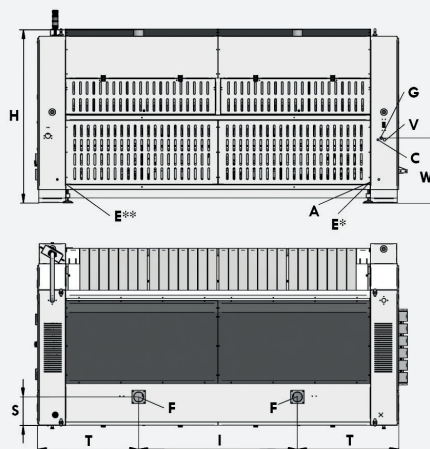

- A. Compressed air inlet
- C. Condensation discharge (steam heating)
- E. Electrical connection
- F. Fumes discharge connection
- G. Gas inlet (gas heating)
- V. Steam inlet (steam heating)

- \* Linen right exit
- \*\* Linen left exit

	H	I	T	S	A	C	E	F	G	V	W
SE2660 (mm)	1.867	1.196	1.208	478	Ø 12	1/2"	5G4	Ø 120	1"	1"	765
SE3360 (mm)	1.867	1.896	1.208	478	Ø 12	1/2"	5G4	Ø 120	1"	1"	765