



COMPACT FLATWORK IRONERS

SHEER PRODUCTION VOLUME IN REALLY REDUCED SPACES

FEATURES

SEXTANS SE2680-3380

- Flatwork ironers with roll sizes: 2.600 and 3.300 mm long and diameter 800 mm.
- Panels in painted steel.
- One or two working lanes: one lane for bedsheets and two lanes for tablecloth and smaller pieces.
- Length fold (1 or 2 folds) and crossfold (up to 3 folds).
- Folding system by photocells and compressed air.
- Two types of linen stacker, with possibility to program the number of items stacked. The stacker can be positioned on either side of the machine.
- Polished steel roll, with finger guard.
- CE certificate and gas certifications.
- Frequency control.
- Feeding and ironing belts are Nomex.
- Touch-screen control: programs can be created with speed control (between 3 and 18 mts/min), temperature and folding parameters.
- Big output capacity, depending on the residual moisture of the linen, up to 220 kg/hour directly from the high spin washer extractor.
- Powerful exhaust system.
- Electric, gas or steam heating.
- Two versions of gas heated models:
 - Gas model with atmospheric burner.
 - **NEW** gas model with **radiant burner.**
25% gas consumption savings and 25% more production.




OPTIONS

- Automatic 1 lane clamp feeder with vacuum feeding belts.
- Small pieces back collector: 2 or 4 lanes + By-Pass.
- Vacuum feeding belts.
- Partial by pass, so different programs can be used in each of the 2 working lanes.
- Linen reject system.
- Double air pressure in length folds for thicker linen.
- Stacker - 1 or 2 lanes.
- Compact (roll-off) stacker - only in 1 lane models.
- Special voltage.




TECHNICAL DATA	UNIT.	SE2680	SE3380
GENERAL DETAILS			
Theoretical production (45%) humidity	Kg/h	140-175	180-220
Ø Roll	mm	800	800
Working width	mm	2.600	3.300
Height floor-feeding	mm	1.110	1.110
Working speed	mt/min	3-13	3-13
Control type	-	Touch	Touch
Programmes	Nº	20	20
Side stacker	Nº	Yes	Yes
FOLDING			
1 lane - Primary fold	Nº	1-2	1-2
1 lane - Cross fold	Nº	1-2-3	1-2-3
2 lanes - Primary fold	Nº	1-2	1-2
2 lanes - Cross fold	Nº	1-2	1-2
POWER			
Heating power (electric model)	kW	75	75
Total electric power (electric model)	kW	78,5	78,5
Heating power (gas model)	kW	89	127
Total electric power (gas model)	kW	3,5	3,5
Heating power (steam model)	kW	85	110
Total electric power (steam model)	kW	3,5	3,5
CONNECTIONS			
Ø Gas inlet	BSP	1"	1"
Ø Steam inlet	BSP	1"	1"
Ø Condensed (Steam model)	BSP	1/2"	1/2"
Ø Air inlet	mm	12	12
DIMENSIONS / PACKAGING DIMENSIONS			
Width / Width	mm	3.718 / 3.800	4.418 / 4.500
Depth / Depth	mm	2.209 / 2.300	2.209 / 2.300
Height / Height	mm	2.080 / 2.330	2.080 / 2.330
Weight / Weight	Kg	3.350 / 3.750	3.730 / 4.330
Volume	m3	17,08 / 20,36	20,30 / 24,12
OTHERS			
No. Fume outlet	Nº	2	2
Ø Fume outlet	mm	120	120
Air flow	m3/h	2 x 1.000	2 x 1.000
Air Consumption (6,5 Bar)	Nl/h	19.000	19.000
Sound Level	dB	70	70

Compact Stacker
(roll-off)



Stacker





Compact Stacker

	L	P
SE2680	4.309	2.774
SE3380	5.009	2.774

Stacker

	L	P
SE2680	5.070	2.863
SE3380	5.770	2.863

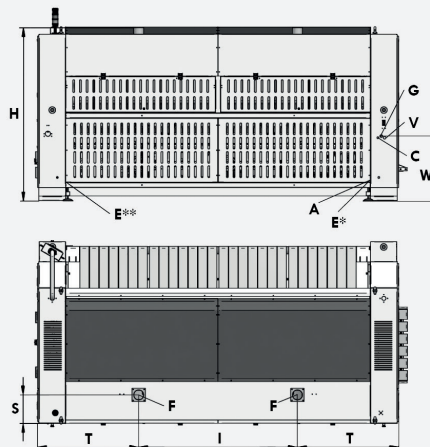

- A. Compressed air inlet
- C. Condensation discharge (steam heating)
- E. Electrical connection
- F. Fumes discharge connection
- G. Gas inlet (gas heating)
- V. Steam inlet (steam heating)

- * Linen right exit
- ** Linen left exit

	H	I	T	S	A	C	E	F	G	V	W
SE2680 (mm)	2.067	1.196	1.208	340	Ø 12	1/2"	5G4	Ø 120	1"	1"	765
SE3380 (mm)	2.067	1.896	1.208	340	Ø 12	1/2"	5G4	Ø 120	1"	1"	765