



COMPACT FLATWORK IRONERS

SHEER PRODUCTION VOLUME IN REALLY REDUCED SPACES

FEATURES

CYGNUS CY2660-3360

- Flatwork ironers with roll sizes: 2.600 and 3.300 mm wide and 600 mm diameter.
- Panels in painted steel.
- Frequency control.
- Feeding and ironing belts are Nomex.
- Panels in white painted steel.
- Polished steel roll, with finger guard.
- CE certificate and gas certifications.
- Touch-screen control: programs can be created with speed control (between 3 and 18 mts/min) and temperature.
- Big output capacity, depending on the residual moisture of the linen, up to 140 kg/hour straight from the high spin washer extractor.
- Electric, gas or steam heating.
- Powerful exhaust System.



OPTIONS

- Automatic 1 lane clamp feeder with vacuum feeding belts.
- Vacuum feeding belts.
- Linen reject system.
- Rear delivery of the linen with collection table.
- Motorized rear exit - height of 850 mm.
- Special voltage.




SECADO
DRYING



PLANCHADO
IRONING

TECHNICAL DATA	UNIT.	CY2660	CY3360
GENERAL DETAILS			
Theoretical production (45%) humidity	Kg/h	75-105	110-140
Ø Roll	mm	600	600
Working width	mm	2.600	3.300
Height floor-feeding	mm	1.050	1.050
Working speed	mt/min	3-10	3-10
Control type	-	Touch	Touch
POWER			
Heating power (electric model)	kW	60	60
Total electric power (electric model)	kW	61,9	61,9
Heating power (gas model)	kW	65	82
Total electric power (gas model)	kW	1,9	1,9
Heating power (steam model)	kW	55	75
Total electric power (steam model)	kW	1,9	1,9
CONNECTIONS			
Ø Gas inlet	BSP	1"	1"
Ø Steam inlet	BSP	1"	1"
Ø Condensed (Steam model)	BSP	1/2"	1/2"
Ø Air inlet	mm	12	12
DIMENSIONS / PACKAGING DIMENSIONS			
Width / Width	mm	3.674/3.760	4.374/4.460
Depth / Depth	mm	1.445/1.540	1.445/1.540
Height / Height	mm	1.810/2.060	1.810/2.060
Weight / Weight	Kg	1.800/2.050	2.050/2.350
Volume	m3	9,61/11,93	11,44/14,15
OTHERS			
No. Fume outlet	N°	2	2
Ø Fume outlet	mm	120	120
Air flow	m3/h	2 x 1.000	2 x 1.000
Air Consumption (6,5 Bar)	NI/h	5.000	5.000
Sound Level	dB	70	70

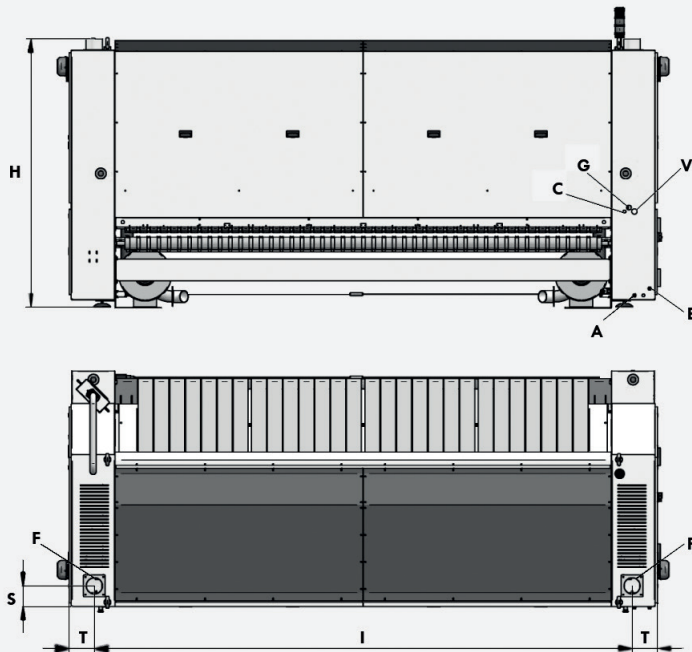

- A. Compressed air inlet
- C. Condensation discharge (steam heating)
- E. Electrical connection
- F. Fumes discharge connection
- G. Gas inlet (gas heating)
- V. Steam inlet (steam heating)

	H	I	T	S	A	C	E	F	G	V
CY2660	1.800	3.242	186	152	Ø 12	1/2"	5 x 2,5	Ø 120	1"	1"
CY3360	1.800	3.942	186	152	Ø 12	1/2"	5 x 2,5	Ø 120	1"	1"