

DTT-45/60/80 ECO-ENERGY TUMBLE DRYERS



TOUCH II

User friendly and totally programmable 7" Touch II USB Connection. PC software free of charge for programming, traceability, data analysis... Videos on display (ads, instructions, etc.) 37 languages



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

EFFICIENT DRY - Intelligent humidity control. With new drum inlet temperature control
AIR RE-CYCLE - Efficient air recirculation system
THERMAL INSULATION
Double door glass
FULL FLOW - New 'optimized' system of mixed airflow
Big fluff filter



VERSATILITY

Make to order - customisation
WET CLEANING



CONNECTIVITY

Remote technical service
Management of laundries



ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters



MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance



OTHERS


Grey skinplate outer casing, stainless steel look
SFEX - Integrated Fire Extinguishing System
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Heating options: electric, gas and steam
CE approved



OPTIONS

- New dosing/vaporizing system
- Exhaust silencer Ø300
- Printer
- DomusConnect communication kit
- Tropicalized model
- Rear panel external air + filter
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Stainless steel battery
- Low pressure steam battery
- Wooden packing
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA	UNIT.	DTT-45 ECO-ENERGY	DTT-60 ECO-ENERGY	DTT-80 ECO-ENERGY			
CAPACITY							
Capacity 1/18	Kg	50	67	83			
Capacity 1/20	Kg	45	60	75			
Hourly Output ECO-ENERGY*	Kg/h	96,4	144	187,5			
Evaporation capacity ECO-ENERGY*	l/h	48,2	72	93,8			
DRUM							
Ø Drum	mm	1.225	1.225	1.225			
Ø Door	mm	802	802	802			
Door center height	mm	1.275	1.275	1.275			
Load hole bottom height	mm	874	874	874			
Drum length	mm	760	1.020	1.252			
Drum volume	l	896	1.202	1.500			
POWER							
Drum motor power	Kw	0,75	1,1	1,5			
Fan motor power ECO-ENERGY	Kw	2,2	2,2	2,2			
Electric heating power ALL RANGES	Kw	54	72	72			
Total electric power (elec.model) ECO-ENERGY	Kw	57	75,35	75,75			
Gas heating power ALL RANGES	Kw	60	90	120			
Total electric power (gas model) ECO-ENERGY	Kw	3	3,35	3,75			
Steam heating power ALL RANGES	Kw	91,3	128	128			
Steam heating power (gas model) ECO-ENERGY	Kw	3	3,35	3,75			
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + N + T	Nº x mm2 / A	-	-	-	-	-	-
Tension 230V - III + T	Nº x mm2 / A	-	4 x 2,5 / 20A	-	4 x 2,5 / 32A	-	4 x 2,5 / 32A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 35 / 100A	5 x 1,5 / 20A	5 x 50 / 125A	5 x 1,5 / 32A	5 x 50 / 125A	5 x 1,5 / 32A
Ø Gas inlet	BSP	3/4"		3/4"		3/4"	
Ø Steam inlet	BSP	1"		1"		1"	
Ø Condensed (Steam models)	BSP	1"		1"		1"	
DIMENSIONS / PACKING DIMENSIONS							
Net Width / Gross Width	mm	1.270/1.330		1.270/1.330		1.270/1.330	
Net Depth / Gross Depth	mm	1.106/1.185		1.366/1.445		1.598/1.705	
Net Height / Gross Height	mm	2.380/2.150		2.380/2.150		2.380/2.150	
Height without heating battery	mm	1.950		1.950		1.950	
Net weight / Gross weight	Kg	395/430		529/575		657/715	
OTHERS							
Max airflow ECO-ENERGY	m3/h	4500		4500		4500	
Ø Fume exhaust	mm	300		300		300	
Sound level ECO-ENERGY	dB	67		67		67	

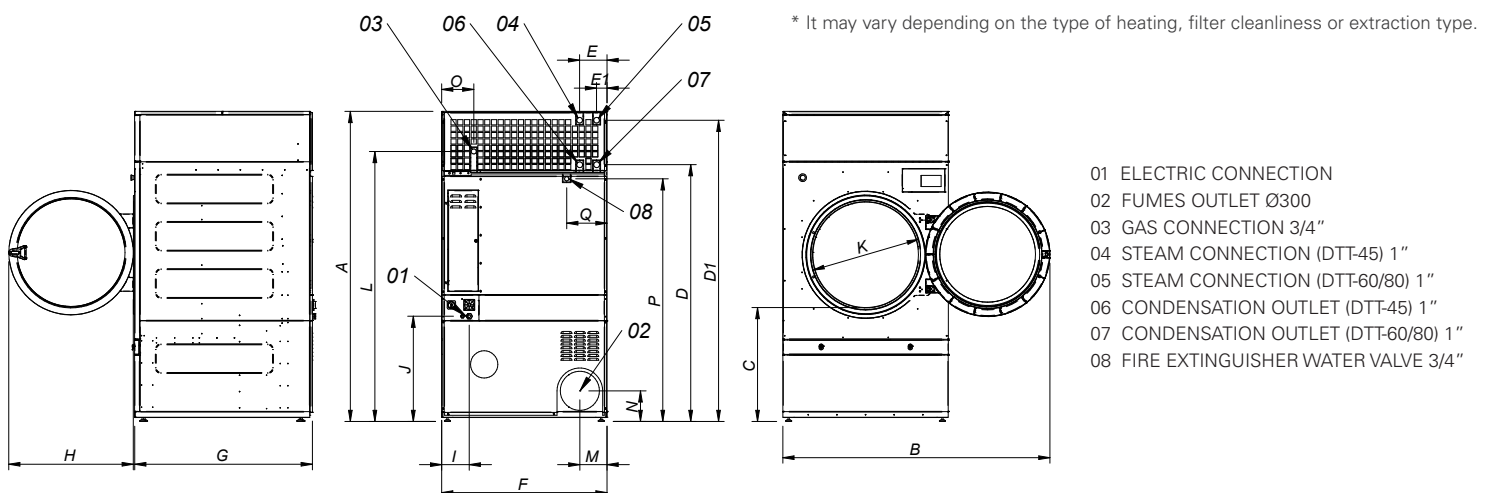

	A	B	C	D	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q
DTT-45	2380	2045	874	1981	211	80	1270	1106	957	138	813	802	2088	214	240	244	1865	195
DTT-60	2380	2045	874	1981	211	80	1270	1366	957	138	813	802	2088	214	240	244	1865	195
DTT-80	2380	2045	874	1981	211	80	1270	1598	957	138	813	802	2088	214	240	244	1865	195